


Armarac® Modula Technical Data

MX-800-N4X Cooling Schematic

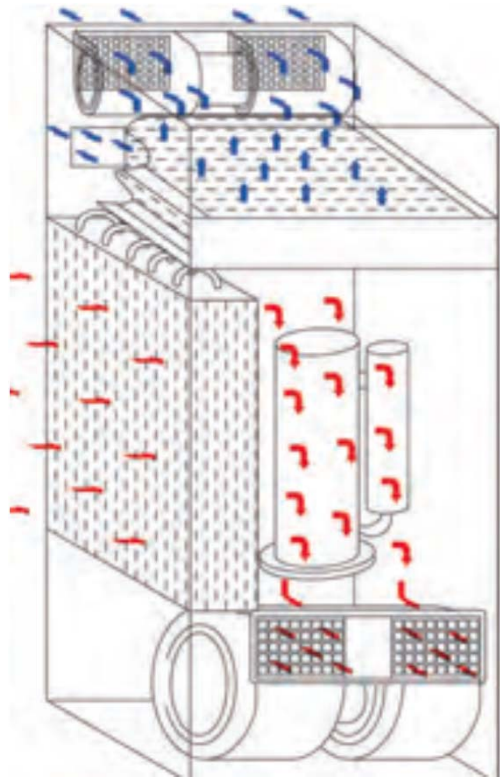


Conditioned
Enclosure Air
Flow - closed
cycle LHS

Ambient Air Flow -
outlet LHS
(w/o exhaust box)

Ambient Air Flow -
outlet RHS
(w/o exhaust box)

Ambient Air
Flow - inlet
LHS

Ambient Air
Flow - inlet
RHS

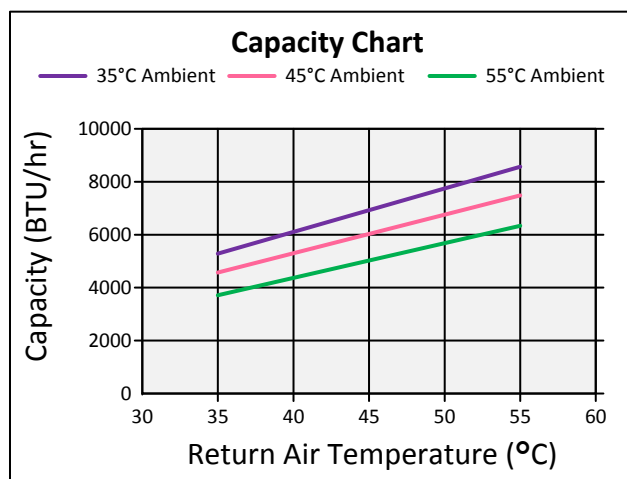

| Model | BTU/Watts | Volts | Max Amps | Max Temp °F/°C |
|--------------|-----------|--------------|----------|----------------|
| MX800N4X-230 | 6000/1758 | 230V 50/60Hz | 5.2A | 140/60 |
| MX800N4X-120 | 6000/1758 | 120V 60Hz | 10.5A | 140/60 |