

# Armarac® MX-800-FAN

## QUICK SPECS

Armarac is a perfect solution where floor space, physical security and environmental control are important. Armarac saves costs by not having to build dedicated rooms, by minimizing cable runs and by enabling innovative layouts.



### Vertiblade provides unprecedented access

Our unique patented Vertiblade articulated vertical mounting system houses your 19-inch equipment in a tighter footprint than ever before possible. Mount any combination of 1U, 2U, 3U or 4U equipment within the 10U vertical capacity.



### Minimum footprint saves floor space and cost

Mount full depth servers, routers, switches and UPS in minimal space while maintaining full accessibility. 10 square feet is all that is required.



### Physically secures all equipment

Armarac is a robust, physically secure cabinet constructed from aluminum. Access options are either manual key locks or electronic locks.



### Designed for convenient remote management

All MX Armarac include EcoSystem, our intelligent ethernet remote monitoring and alert system, which provides full visibility and control of your environment.



### Flexible deployment and expansion

Our attractive functional design can be mounted on its own, or stack up two modules to get double the capacity. Mix and match internal layouts to provide a perfect deployment solution.



### Protects against environmental hazards

Keep all equipment quiet, cool, clean and secure in a controlled environment. Fan assisted active cooling provides 540cfm of forced air to the face of the equipment.



- Manufactured in the USA from local and imported components.

#### INTERNAL VERTIBLADE LAYOUT OPTIONS INCLUDE:

- MX-VB-1S standard panel to hold any 19in equipment 800mm (32in) deep
- MX-VB-1M configurable multi-fit panel for non-rackmount items
- MX-VB-2Z zig-zag panel for fitting six 19in patch panels in 2U of space
- MX-PP-HZ ultra-compact 18U high-density horizontal patch panels
- MX-VB-VESA vesa mount for LCD and integrated keyboard/trackball

# Armarac® MX-800-FAN

## DIMENSIONS & RATINGS

### DIMENSIONS



Height Open/Closed (ho/hc)	1130mm (44.5")
Width Closed (wc)	720mm (28.3")
Width Open (wo)	1322mm (54.0")
Depth Closed (dc)	573mm (22.5")
Depth Open (do)	713mm (28.0")
Area Floor Space Closed	0.41m <sup>2</sup> (4.44ft <sup>2</sup> )
Area Floor Space Open	0.94m <sup>2</sup> (10.12ft <sup>2</sup> )
Net Weight (without equipment)	63kg (139lb)
Wall Mount Stud Centers	400mm (16")
Wall Mount Stud Centers with brackets	600mm (24")

### ENVIRONMENT

Air Delivery	255l/s (540cfm)
Power Consumption (internal)	10.5W

### CAPACITY


Standard rack full-size equip. capacity	10U
Internal patch panel slots: top / bottom	3 @ 19" / 3 @ 19"
Max. weight per 1U mounting bracket	20kg (44lb)
Max. depth xU mounted equipment	800mm (32")
Max. rated equipment weight/load	200kg (440lb)

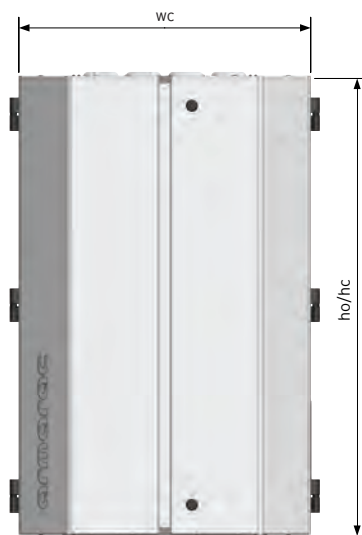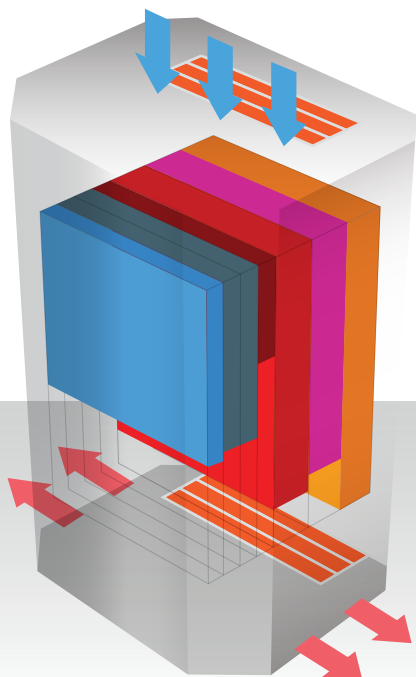


Front View - Doors Closed



Side View - Doors Closed

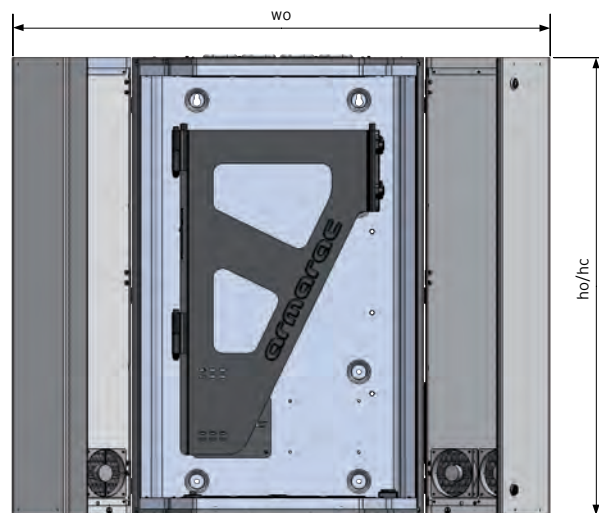

Front View - Doors Open

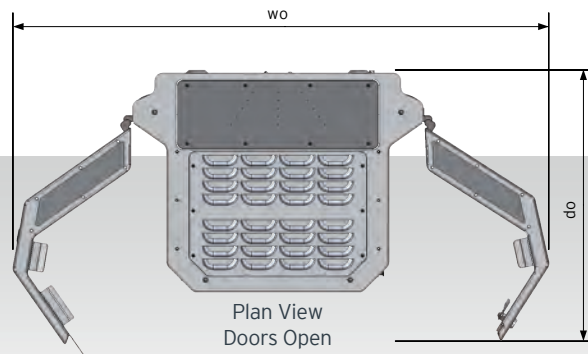Plan View  
Doors Open