

Armarac® MZ-GND-BAR


MX ACCESSORIES QUICK SPECS

Available for all MX Series Armarac enclosures, the MZ-GND-BAR kit provides a dedicated position for all end-user equipment and chassis/Vertiblade mounting bracket grounding/earthing.

The space-saving zero-U design mounts to the upper or lower internal section of the MX series Armaracs, and does not consume any of the equipment mounting positions, whilst providing easy cabling access and unobstructed view of the ground bonding cables and their fixings.

Fabricated from high-quality copper solid rectangular section and finished with electrical-grade tin plating to ASTM B545-13, every Ground Bar provides capacity for twelve (12) twin-hole earth lugs to be terminated with adequate clearance and angle take offs for upto 8AWG conductors.

This kit can be optional at time of purchase, or is available as a retrofit kit, which fits seamlessly into both MX800FAN cooled and MX800N4X Air-Conditioned enclosures.

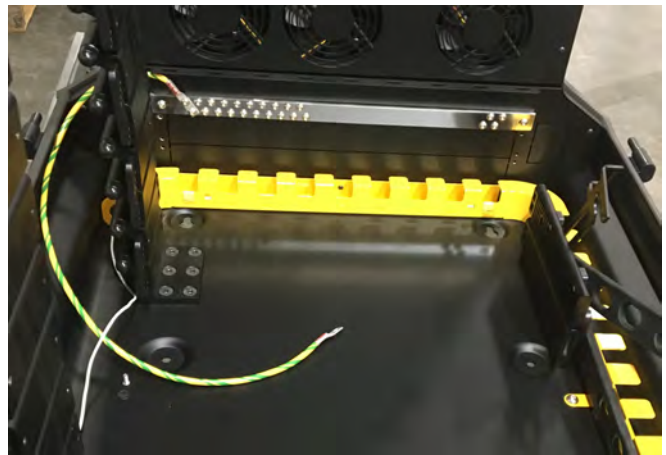

SPECIFICATIONS

Copper Rectangular Solid Bar (DxWxL)	5mm x 25mm x 485mm
Tin Plating	ASTM B545-13 CLASS C
Capacity of twin-hole lugs	12 @ 30°
Twin-hole Lug screw dimensions	M6 x2 @ 15.63mm
Chassis ground wire (supplied)	8AWG YE/GN flex cable
Vertiblade Ground Wire Kit (10)	14AWG continuous chain